

User Guide - FLWP4Z

RF Control - 4 Zone RGB + CC Touch Wall Panel



Features



- 4 Zone RGB + CCT Colour adjustment and brightness slider
- 2.4GHz wireless technology, control distance up to 30m.
- Pair with one or multiple receivers.
- LED Light indicator on the controller
- 4 Zone Touch panel compatible with both DMX512 (FLDC5Z-DMX) and RF (FLDC5Z) receivers.

Technical Parameters

- Output signal: RF(2.4GHz)
- Input Voltage: 110 - 240VDC (Mains direct Input)
- Light Type: RGB + CCT
- Size: 86x86x35 mm
- Remote distance up to 30m within Free Range. Please allow for 12m within areas restricted by obstacles.

Pairing Guide

Pairing your Wall Panel with each 2.4G RF receiver

- Using the "Match Key"


1. Match, Switch off receiver power, then switch on power again, short press zone key 3 times on the wall panel quickly within 5s after receiver power on, the link has been completed once the connected LED lights flash 3 times. Repeat this process to link further receivers to the wall panel.
2. To Delete a match: Switch off power to the receiver, then switch-on power again, short press the zone key you are deleting 5 times on the remote within 5s after power on, the unlink has been completed once the connected LED lights flash 5 times.

- At Power Up

Match the controller with our receiver (Without using the Match Key)

- Match Switch off receiver power, then switch on power again, (Perform Twice) then short press zone key 3 times on the remote quickly within 5s after receiver power on, the link has been completed once the connected LED lights flash 3 times.
1. To Delete a match: Switch off power to the receiver, then switch on power again, short press the zone key you are deleting 5 times on the remote within 5s after power on, the unlink has been completed once the connected LED lights flash 5 times.

Key Functions

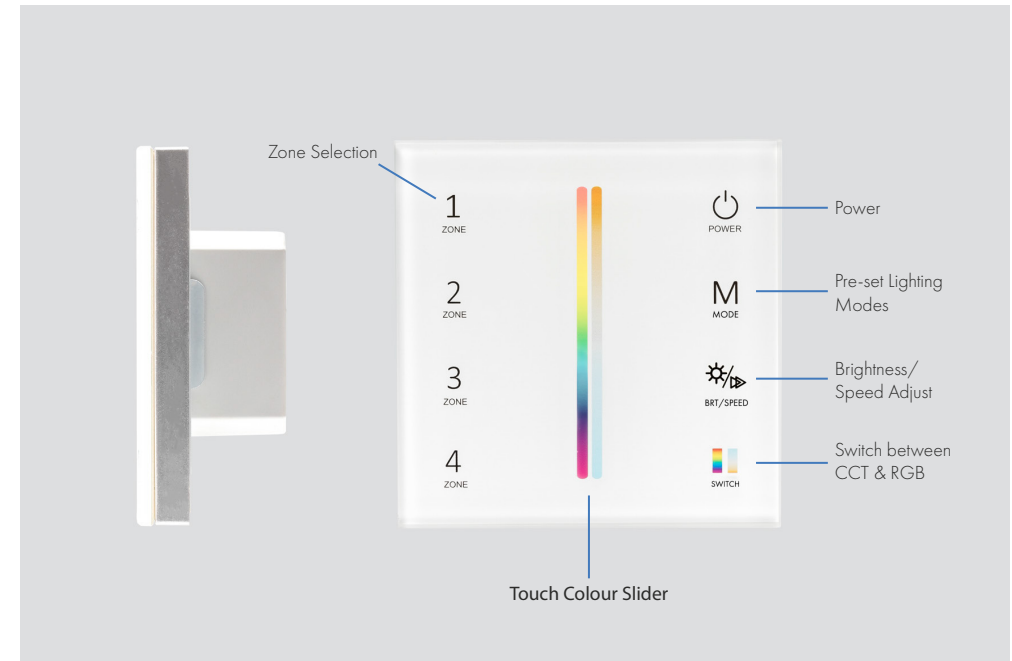

Dimensions

