

User Guide - FLCT1T

RF Control - Tuneable White Slider



Features

- For use with all Tuneable White LED Strips and compatible with Foss FLDC4Y Receivers.
- Sensitive Brightness and colour temperature touch slider.
- RF wireless technology with a control distance of up to 30 metres.
- Pair with one or multiple receivers.
- Battery powered (1 x CR2032).

Technical Parameters

- Output signal: RF(2.4GHz)
- Working voltage: 3VDC CR2032 * 1pcs
- Working current: <5mA
- Standby current: <10µA
- Standby time: 2 years
- Remote distance up to 30m within Free Range. Please allow for 12m within areas restricted by obstacles.
- Working temperature: -30°C ~55°C
- Weight: 40g
- Dimension: L139×W36×H11mm

Operation

- Pull out the plastic battery plate from the battery compartment located on the bottom of the remote.
- When the remote is On, the indicator will display blue. When Off, the indicator will display red.
- The remote will enter into sleep mode after several seconds of inactivity. To quit sleep mode, touch any key or the slider.

Pairing Guide

Pairing your remote with each 2.4GHz RF receiver (FLCD4Y), choose between two pairing methods.

- Using the "Match Key"

Match the controller with our receiver (Using the Match Key on the receiver)


1. Match: Short press the match key, then press the zone key on the remote within 5s.
2. To Delete a Match: Long press the match key on the receiver for 5s.

- At Power Up

Match the controller with our receiver (Without using the Match Key)

1. Match: Switch off receiver power, then switch on power again, short press the zone key 3 times on the remote quickly within 5s after the receiver powers on, the link has been completed once the connected LED lights flash 3 times.
2. To Delete a match: Switch off power to the receiver, then switch on power again, short press the zone key you are deleting 5 times on the remote within 5s after power on, the unlink has been completed once the connected LED lights flash 5 times.

Key Functions

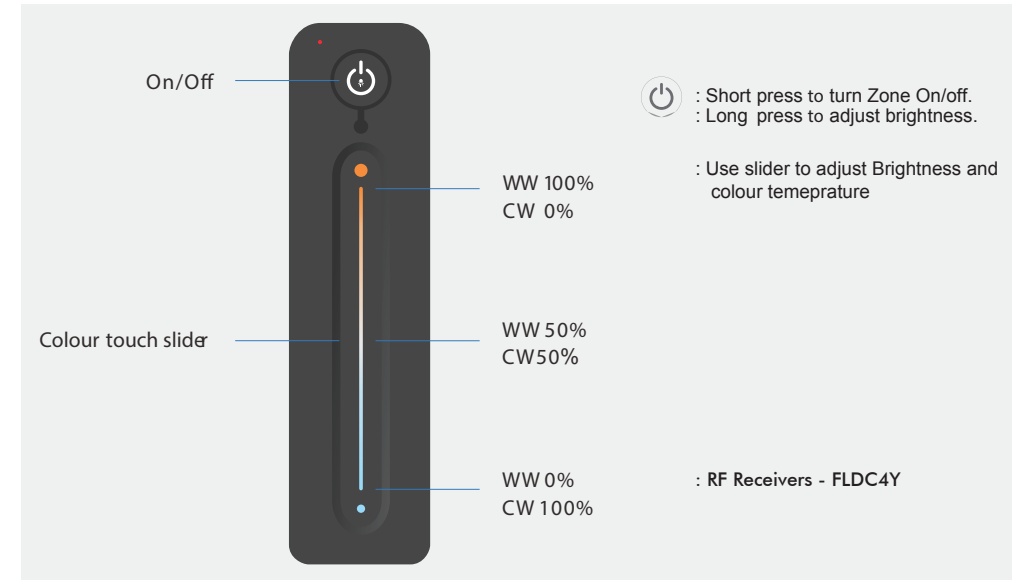

Dimensions

